



Paige®

928.282.2783, Fax: 928.282.2781, jbusshell@paigeelectric.com, www.paigeelectric.com

agwire spec


P7079D - AG

UNARMORED PERIMETER GUIDANCE CABLE

INSULATION: **POLYETHYLENE**

JACKET: **PVC**

SIZES: **14 AWG, 1 OR 2 CONDUCTORS**

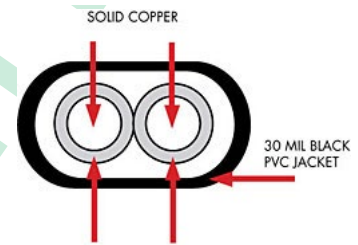

1.0 APPLICATION:

1.1 This specification covers Direct Burial Cables designed specifically to guide Center Pivot Corner systems, consisting of solid conductors insulated with sunlight resistant Polyethylene, armored with stainless steel and having a sunlight resistant jacket overall.

2.0 CONSTRUCTION:

2.1 Conductors:
14 AWG solid annealed uncoated copper conforming to UL standard 719.

2.2 Insulation:
Low Density High Molecular weight Polyethylene with wall thickness of 0.045", suitable for Direct Burial Applications, for operation up to 600 volts and conductor temperatures up to 60°C, UL listed. Black for single conductor and red/white for two conductor cable..

2.4 Outer Jacket:

Sunlight resistant black PVC conforming to IPCEA S-61-402 NEMA WC5 and L 1263, nominal thickness .030. O.D. is .245" ± .010" for single and .384" ± .010" for two conductor cables.

2.5 Surface Print:

"Paige P7079D-AG PERIMETER CABLE 14/1 or 14/2." Additional surface print to customer needs may be specified.